

TECHNICAL DATA SHEET

Q-Sync[®] VS Fan Motors (600-1200 RPM)

The Next Big Leap in Efficiency is Here

Reduce total cost of ownership with patented motor control technology, industry-leading efficiency, long operating life, ease of installation, and rebate eligibility.



Industry-leading
efficiency



Design life of >10 years



Ease of Install



Rebate-friendly



PRODUCT SELECTION

Q-Sync [®] VS						
Line Voltage (VAC) / Phases / Freq		120V / 1 / 60			208-230V / 1 / 60	
Horsepower (Rated full load)		1/4	1/3	1/2	1/4	1/3
Watts (Rated full load)		186.5	249	375	186.5	249
Running Current (Amps)		1.82	2.45	3.67	0.91	1.23
Full Load Efficiency (%)		89.5	91.2	90.5	89.7	92.1
Power Factor (Full Load)		0.92	0.95	0.91	0.98	0.98
Line Voltage Range (VAC)		95-132			176-264	
Line Voltage Range (% Rated)		-20% / +10%			-15% / +15%	
Catalog Number (CW Rotation)		QVD-P25-1ACW-P06E1C	QVD-P33-1ACW-P06E1C	QVD-P50-1ACW-P06E1C	QVD-P25-2ACW-P06E1C	QVD-P33-2ACW-P06E1C
Catalog Number (CCW Rotation)		QVD-P25-1ACC-P06E1C	QVD-P33-1ACC-P06E1C	QVD-P50-1ACC-P06E1C	QVD-P25-2ACC-P06E1C	QVD-P33-2ACC-P06E1C

MOTOR SPECIFICATIONS

Frame Size	48
Motor Type	TEAO (<i>Totally Enclosed Air-Over</i>)
Enclosure Protection	IP65
Insulation Class	Class F
Protection	Thermal (Class A, 105°C)


IP65
CERTIFIED



GENERAL SPECIFICATIONS

Speed Control	Variable
Speed Range (RPM)	600-1200
Ambient Temperature Rating	-40°C to 55°C (-40°F to 122°F)
Certifications / Approvals	UL, CSA
CSA / UL File Number	E465664
Surge Protection	2kV
Maximum Operating Altitude	3,048 m / 10,000 ft
Warranty Term (from shipment date)	2 Years (24 Months)

DIMENSIONS

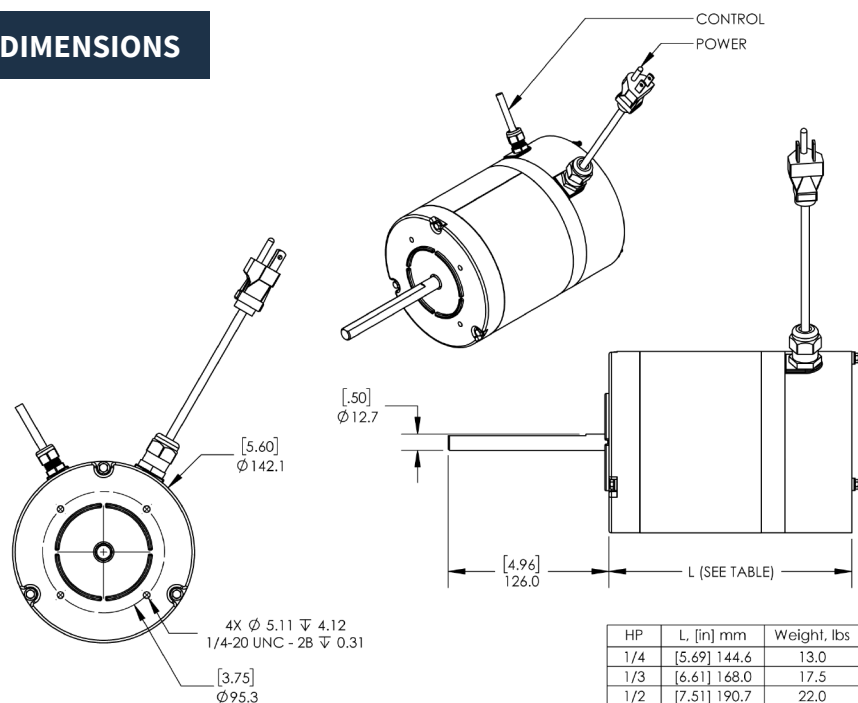

COMPLETE MOTOR CATALOG # BUILDER

Example Catalog Number Complete Motor

		QVD-	P33-	2	A	CW-	P06	E1	C
Q-Sync VS (1-ph, Variable Speed) Discrete/PWM interface	QVD								
Power Rating									
0.25 HP	P25-								
0.33 HP	P33-								
0.50 HP	P50-								
Input (Line) Voltage									
115 VAC	1								
208-230 VAC	2								
Input Frequency									
60 Hz	A-								
Direction of Rotation									
CW (OSE)	CW								
CCW (OSE)	CC								
Motor Type									
6 Pole PM (1200 RPM Base Speed)	P06								
Enclosure									
TEAO / IP65 / 55C	E1								
Mounting									
Face	C								



NOTICE OF CONFIDENTIAL INFORMATION

Information contained herein is Confidential. Where furnished with a proposal, the recipient shall use it solely for the purposes of inspection, installation, or maintenance. Where furnished to a supplier, it shall be used solely in the performance of the contract. The information shall not be used or disclosed by the recipient for any other purpose.

QM Power, Inc.
9319 Robert D. Snyder Rd, Suite 428
Charlotte, NC 28223
+1 (816) 246-4200
www.qmpower.com